


MARKEN GmbH

Gildestr. 2 - 48356 Nordwalde

+49 2573 97 95 200

+49 2573 97 95 202

K 40

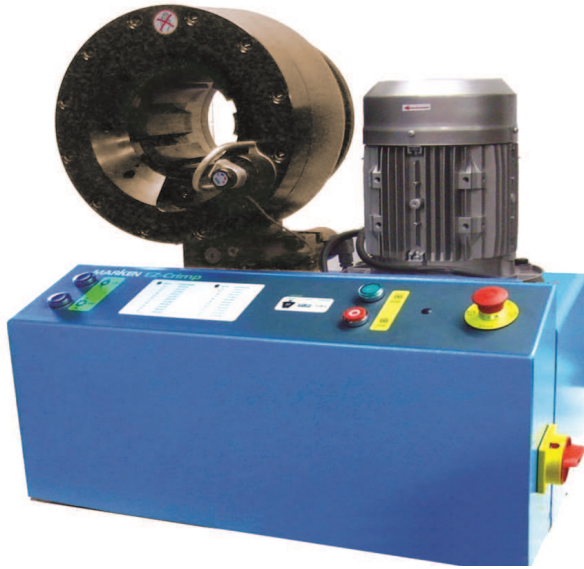

TECHNICAL SPECIFICATIONS

Indicative capacity:

R15 & Interlock	1 1/4"
2 SN	2"
4 Spiral	2"
6 spiral & interlock	1 1/4"
Industrial	2"
Crimp range	4 to 76 mm
Theoretical crimp force	240 tons
Crimping per hour	625
Opening	+38 mm
Opening without dies	118mm
Motor	4kW - 230/400V 3Ph opt: 2,2kW-230V 1ph
Noise	68 dbA
Master die length	100mm
Weight/dimensions	180 Kg 610 x 410 x 635mm

ADVANTAGES

- Compact head
- Crimp force 240 tons
- Large opening
- Radial movement of the master dies

OPTIONS

- Quick change tool
- Foot pedal
- Marking dies
- Half automatic opening
- Backstop

DIE SIZES

N°:	Crimping range:	Length:
10	10.0-12.0	56mm
12	12.0-17.0	56mm
17*	17.0-20.0	56mm
20*	20.0-24.0	70mm
24*	24.0-27.0	70mm
27*	27.0-30.0	70mm
30*	30.0-33.0	70mm
33*	33.0-39.0	70mm
39*	39.0-48.0	80mm
48*	48.0-57.0	110mm
57*	57.0-66.0	110mm
66*	66.0-72.0	100mm

*** INCLUDED IN STANDARD
KIT 10 DIES SETS**

Other diameters available
Ø 6/8/14/15/18/21/36/42/54/70

MARKEN MANUFACTURING

2081 E. Center Circle, Plymouth MN 55441 USA

ISO 9001 : 2008 CERTIFIED